
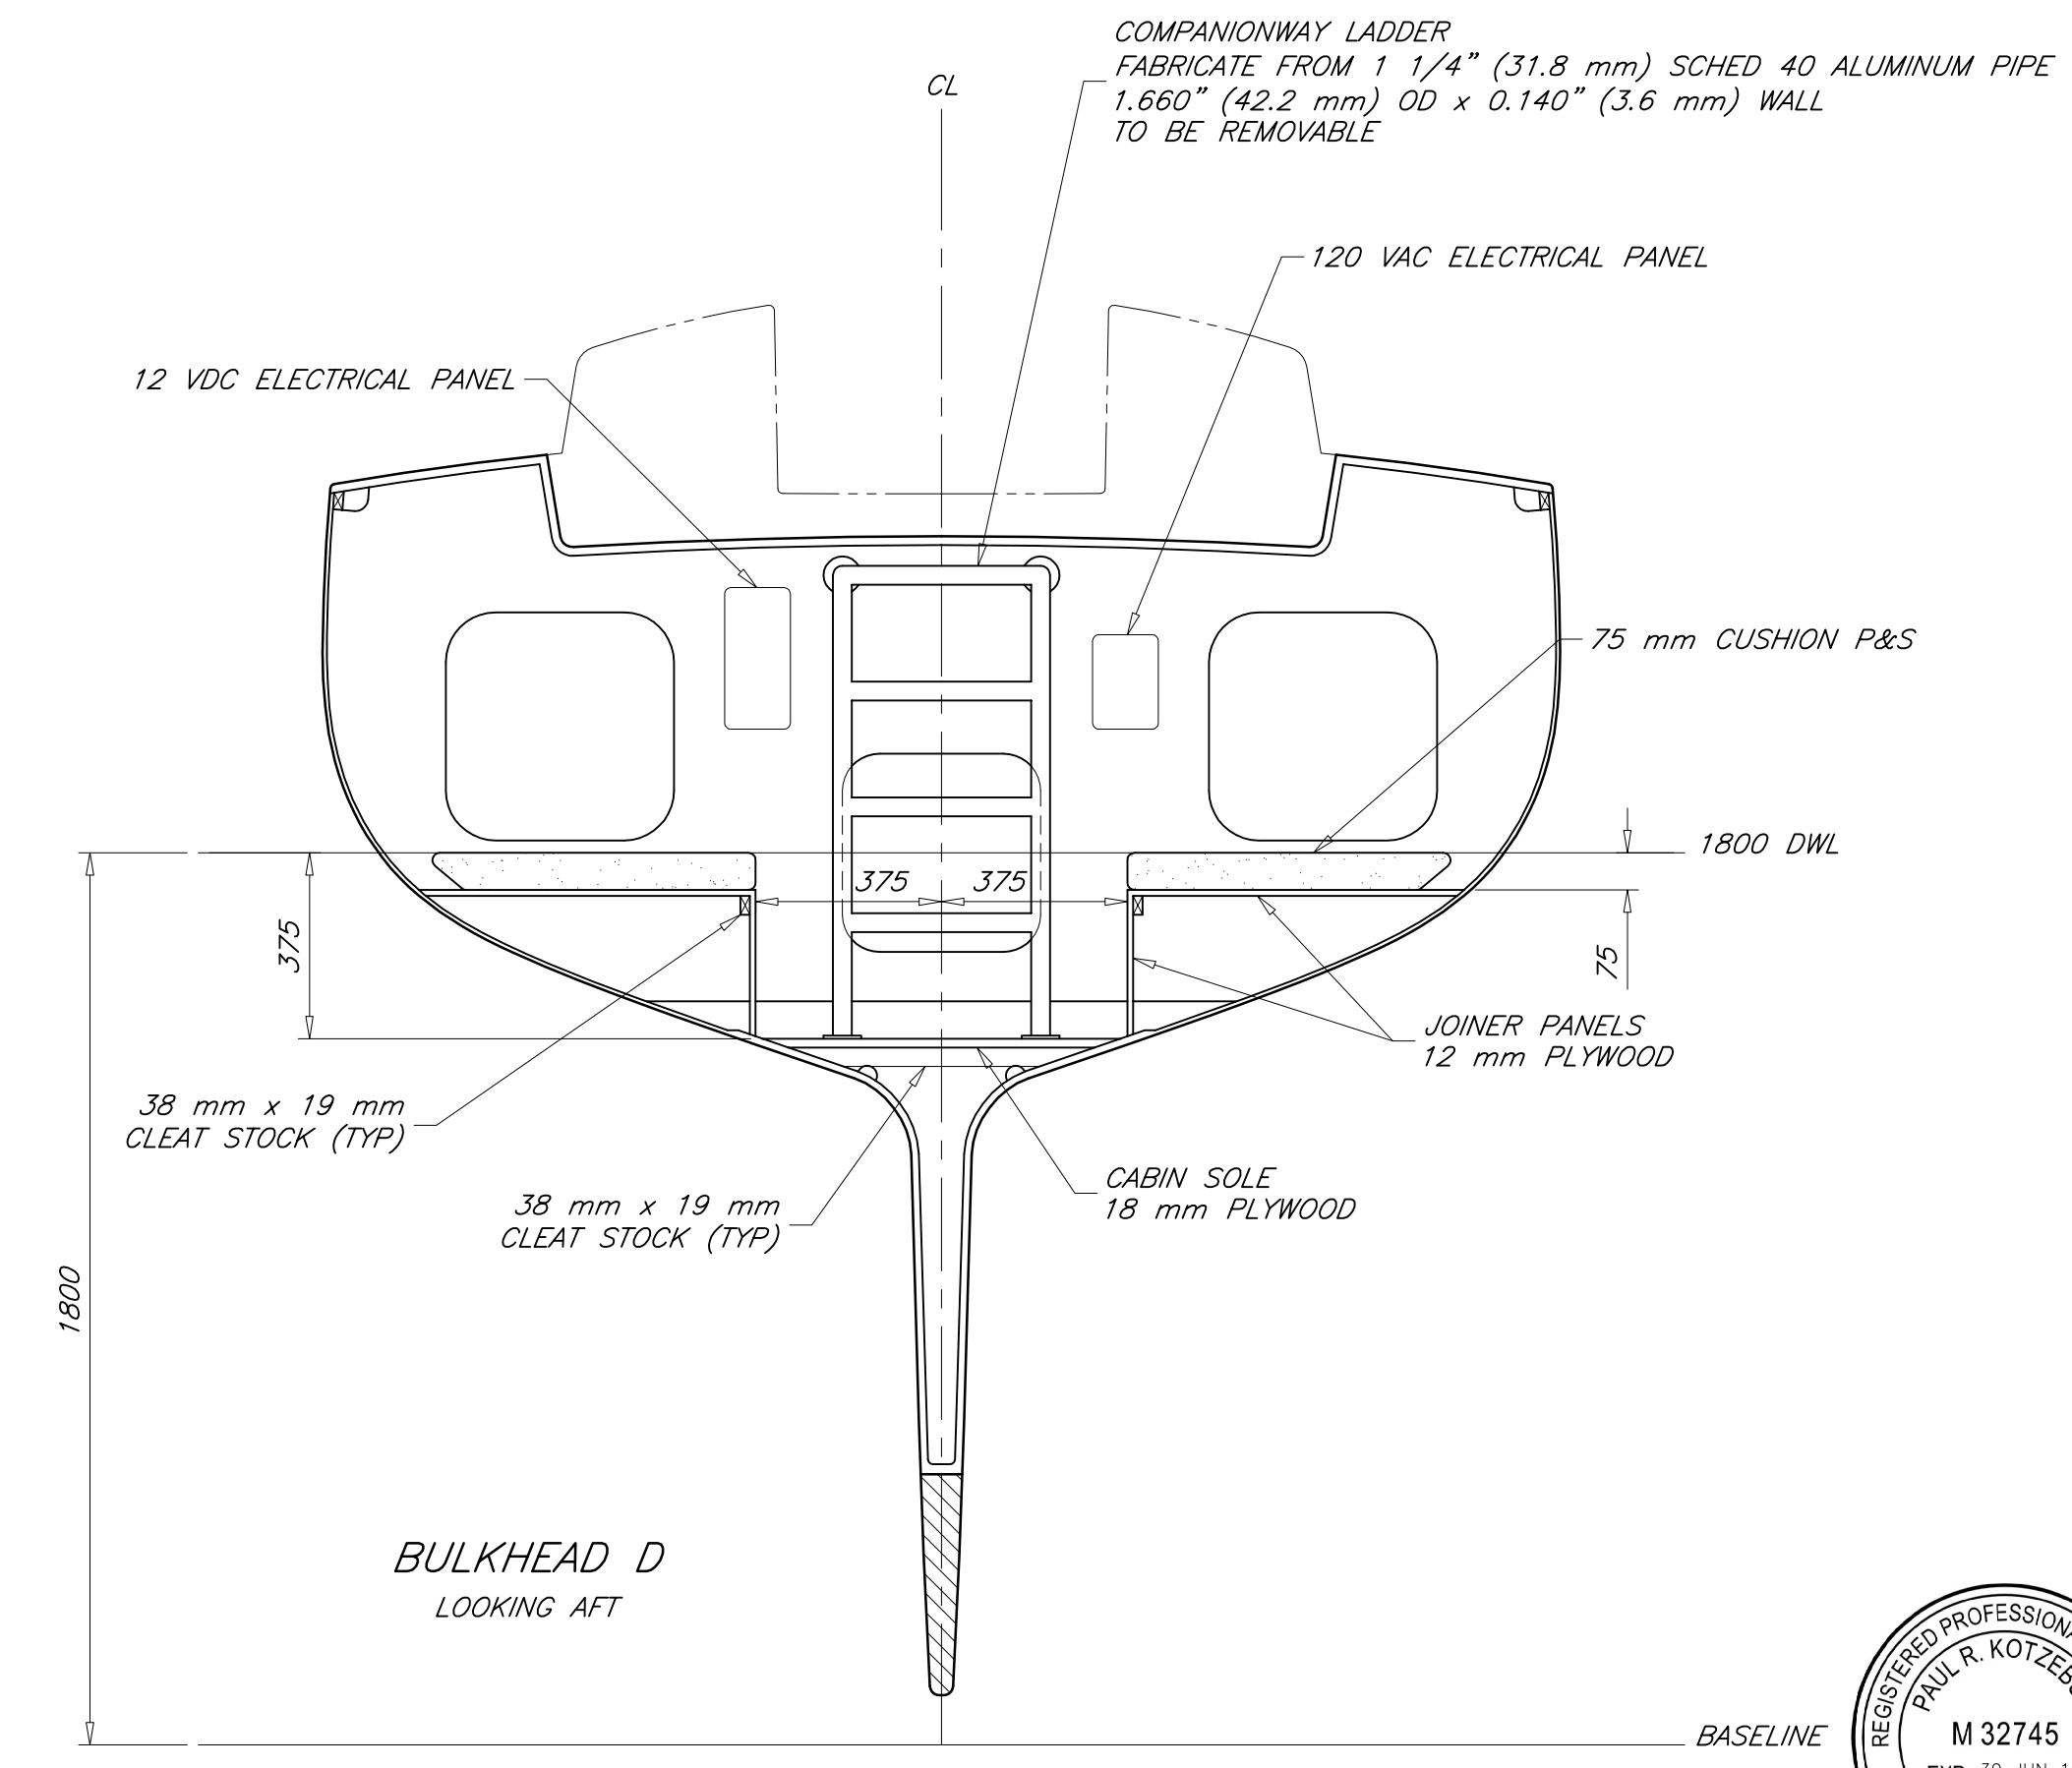
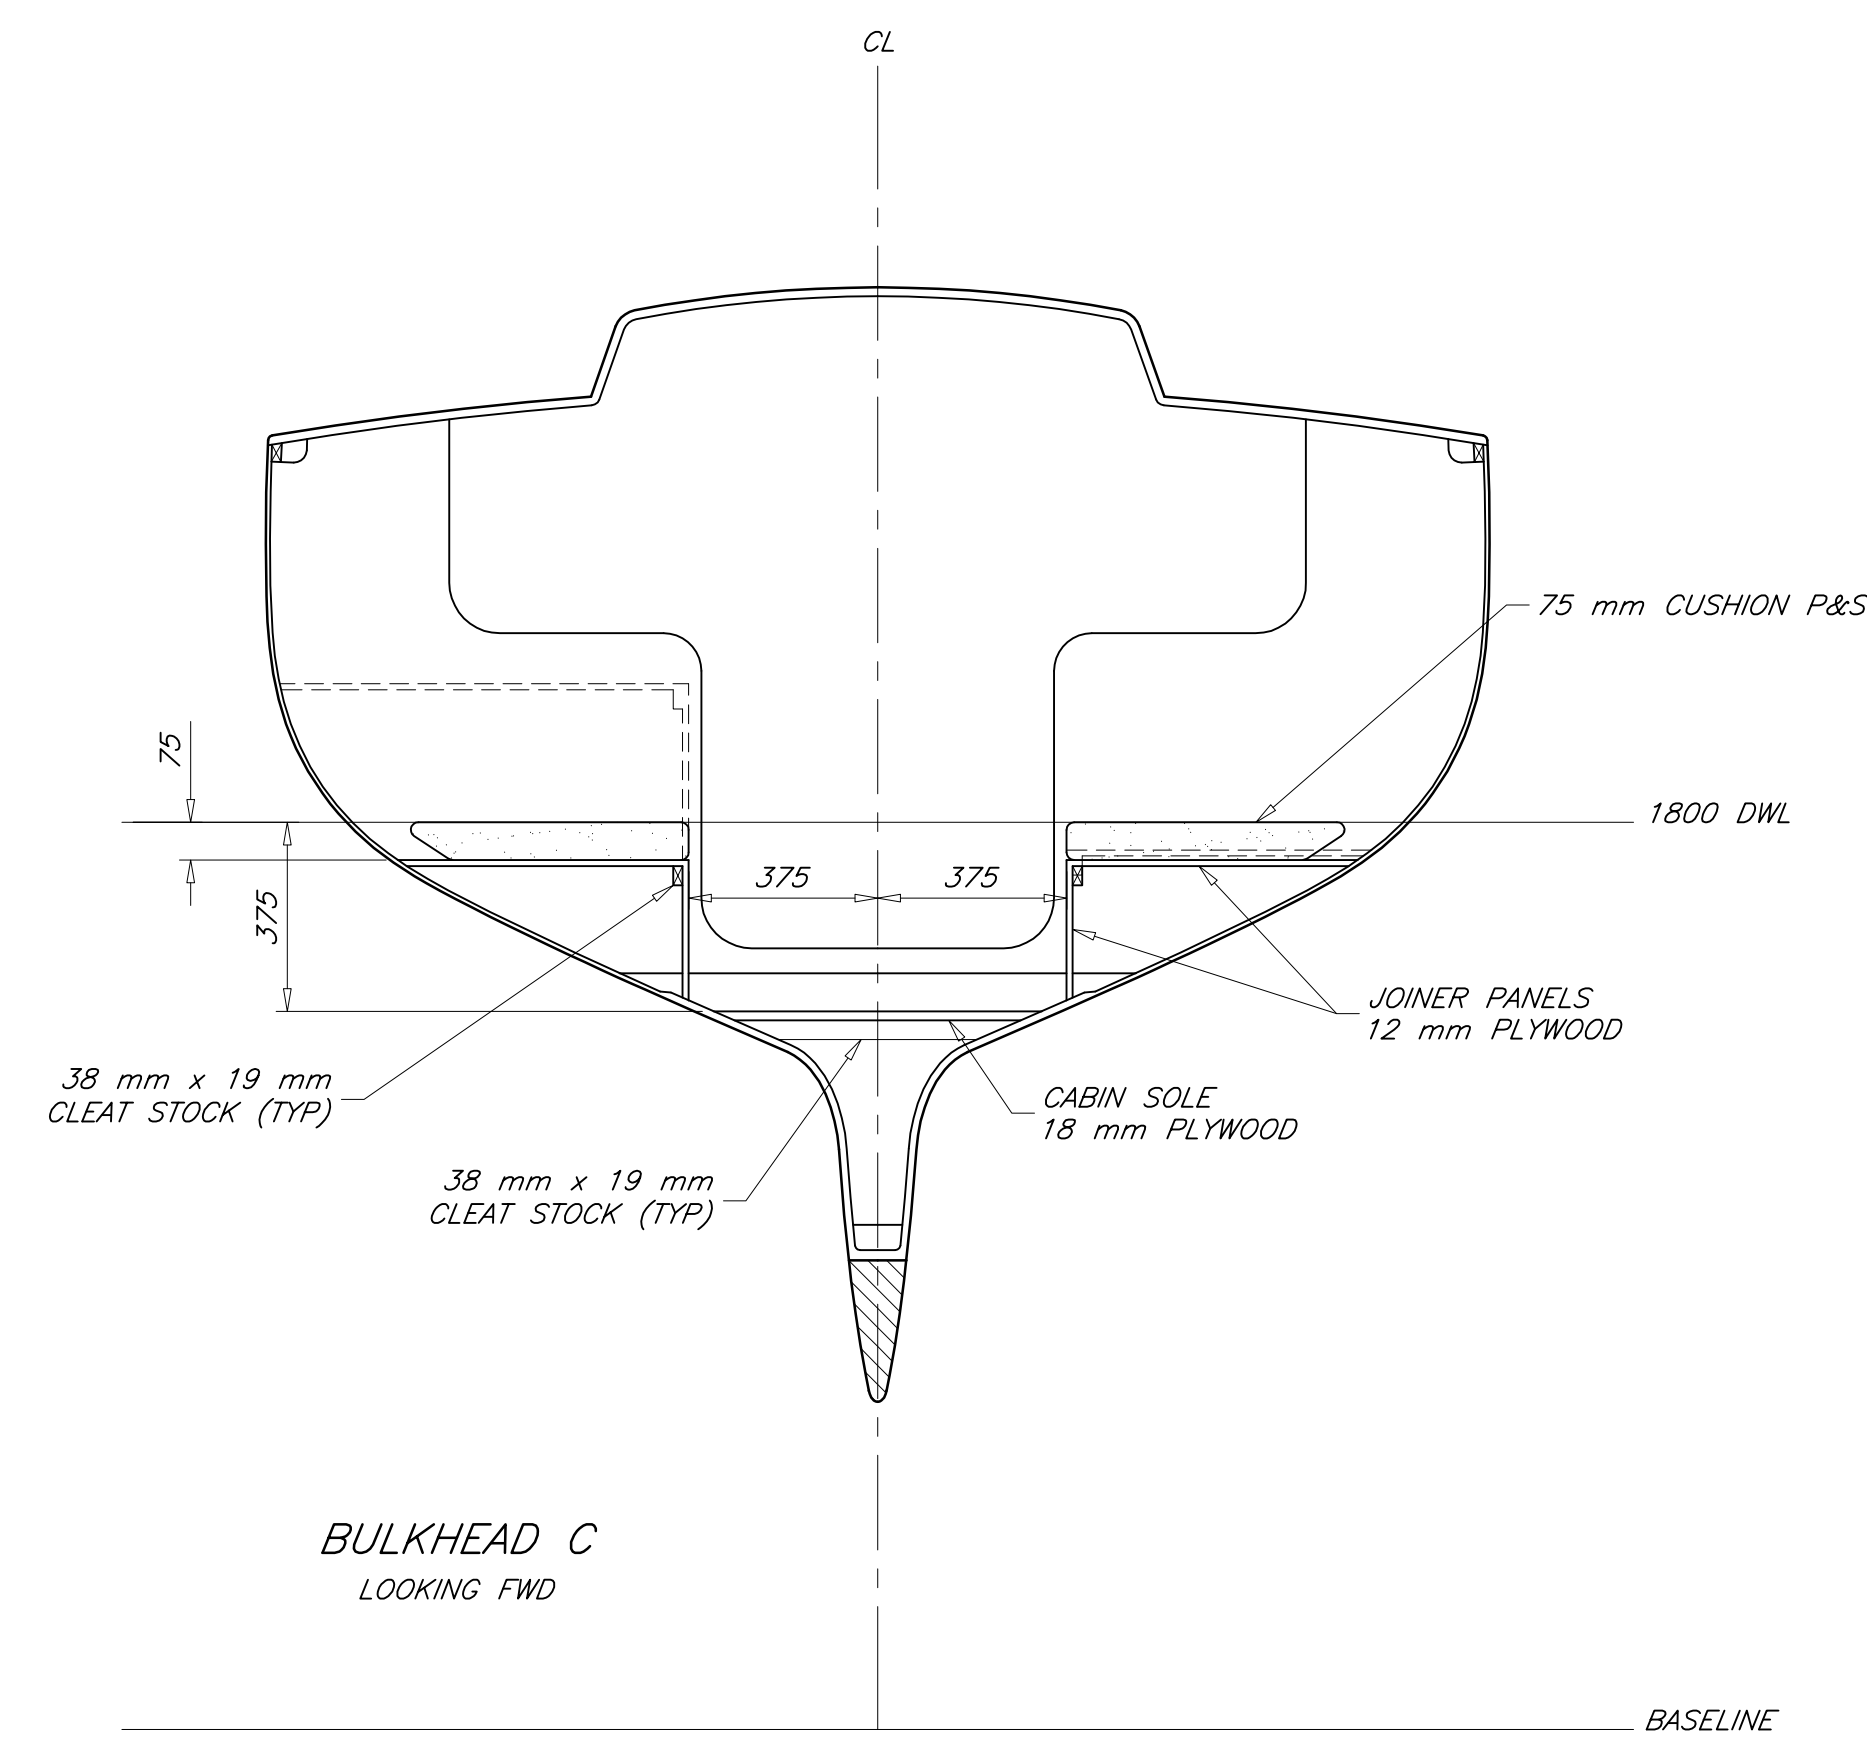
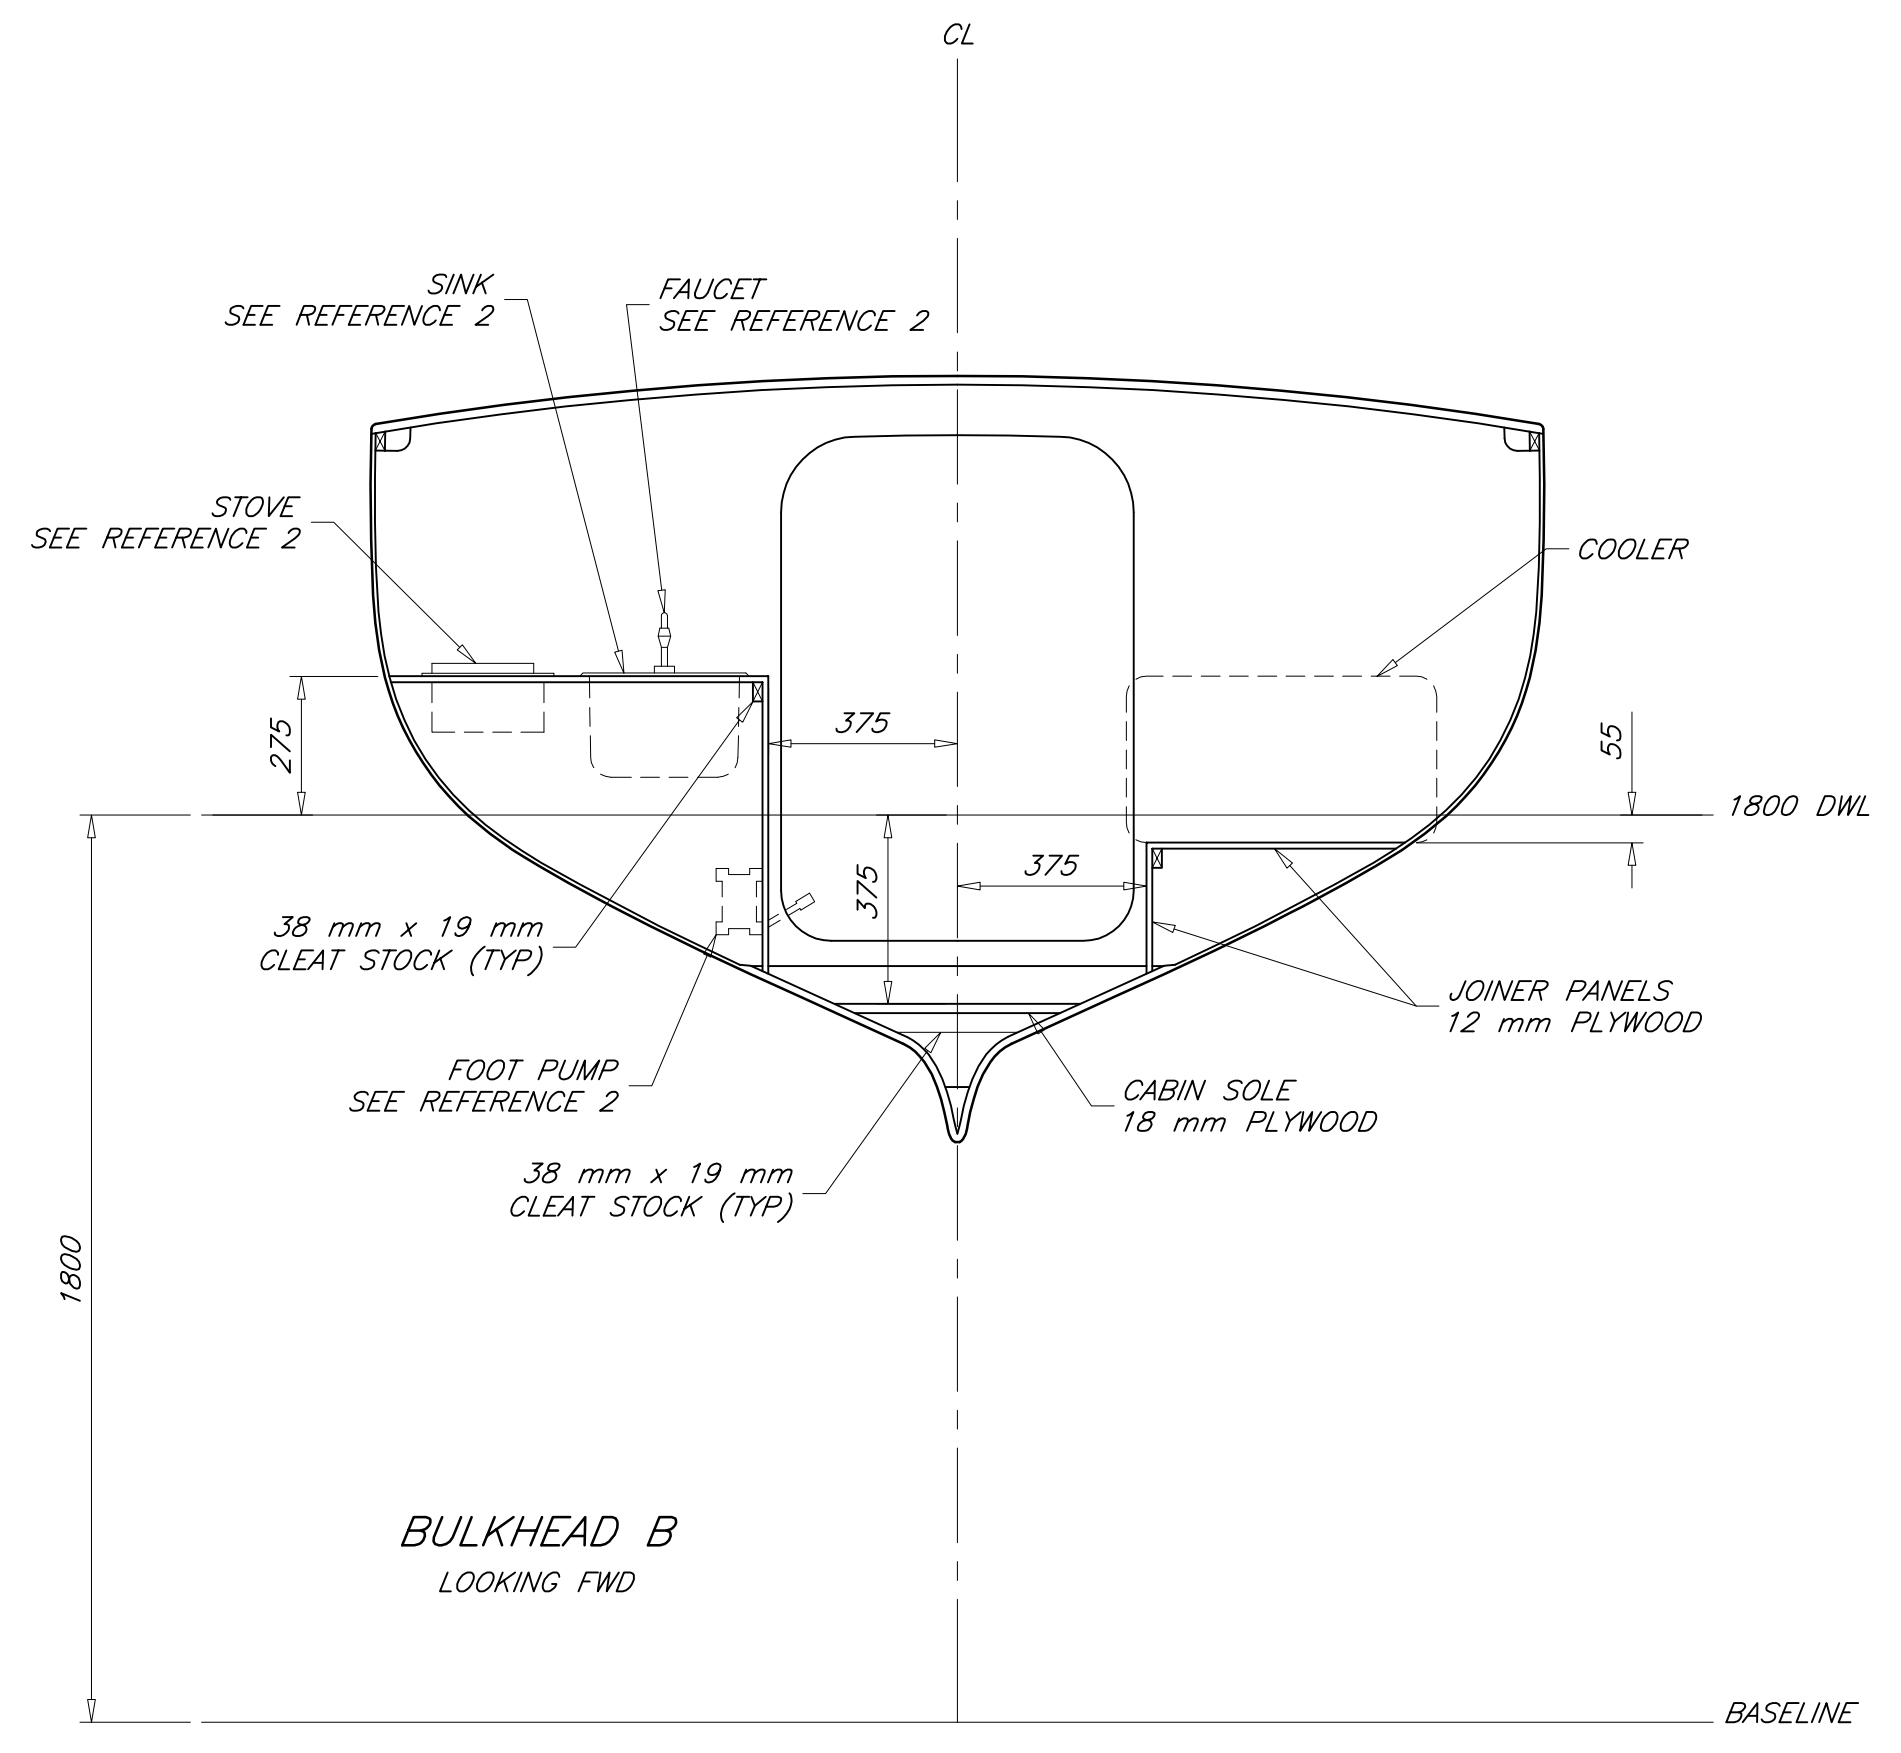


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
ALL	-	ORIGINAL ISSUE	15 MAY 10	P. KOTZEBUE

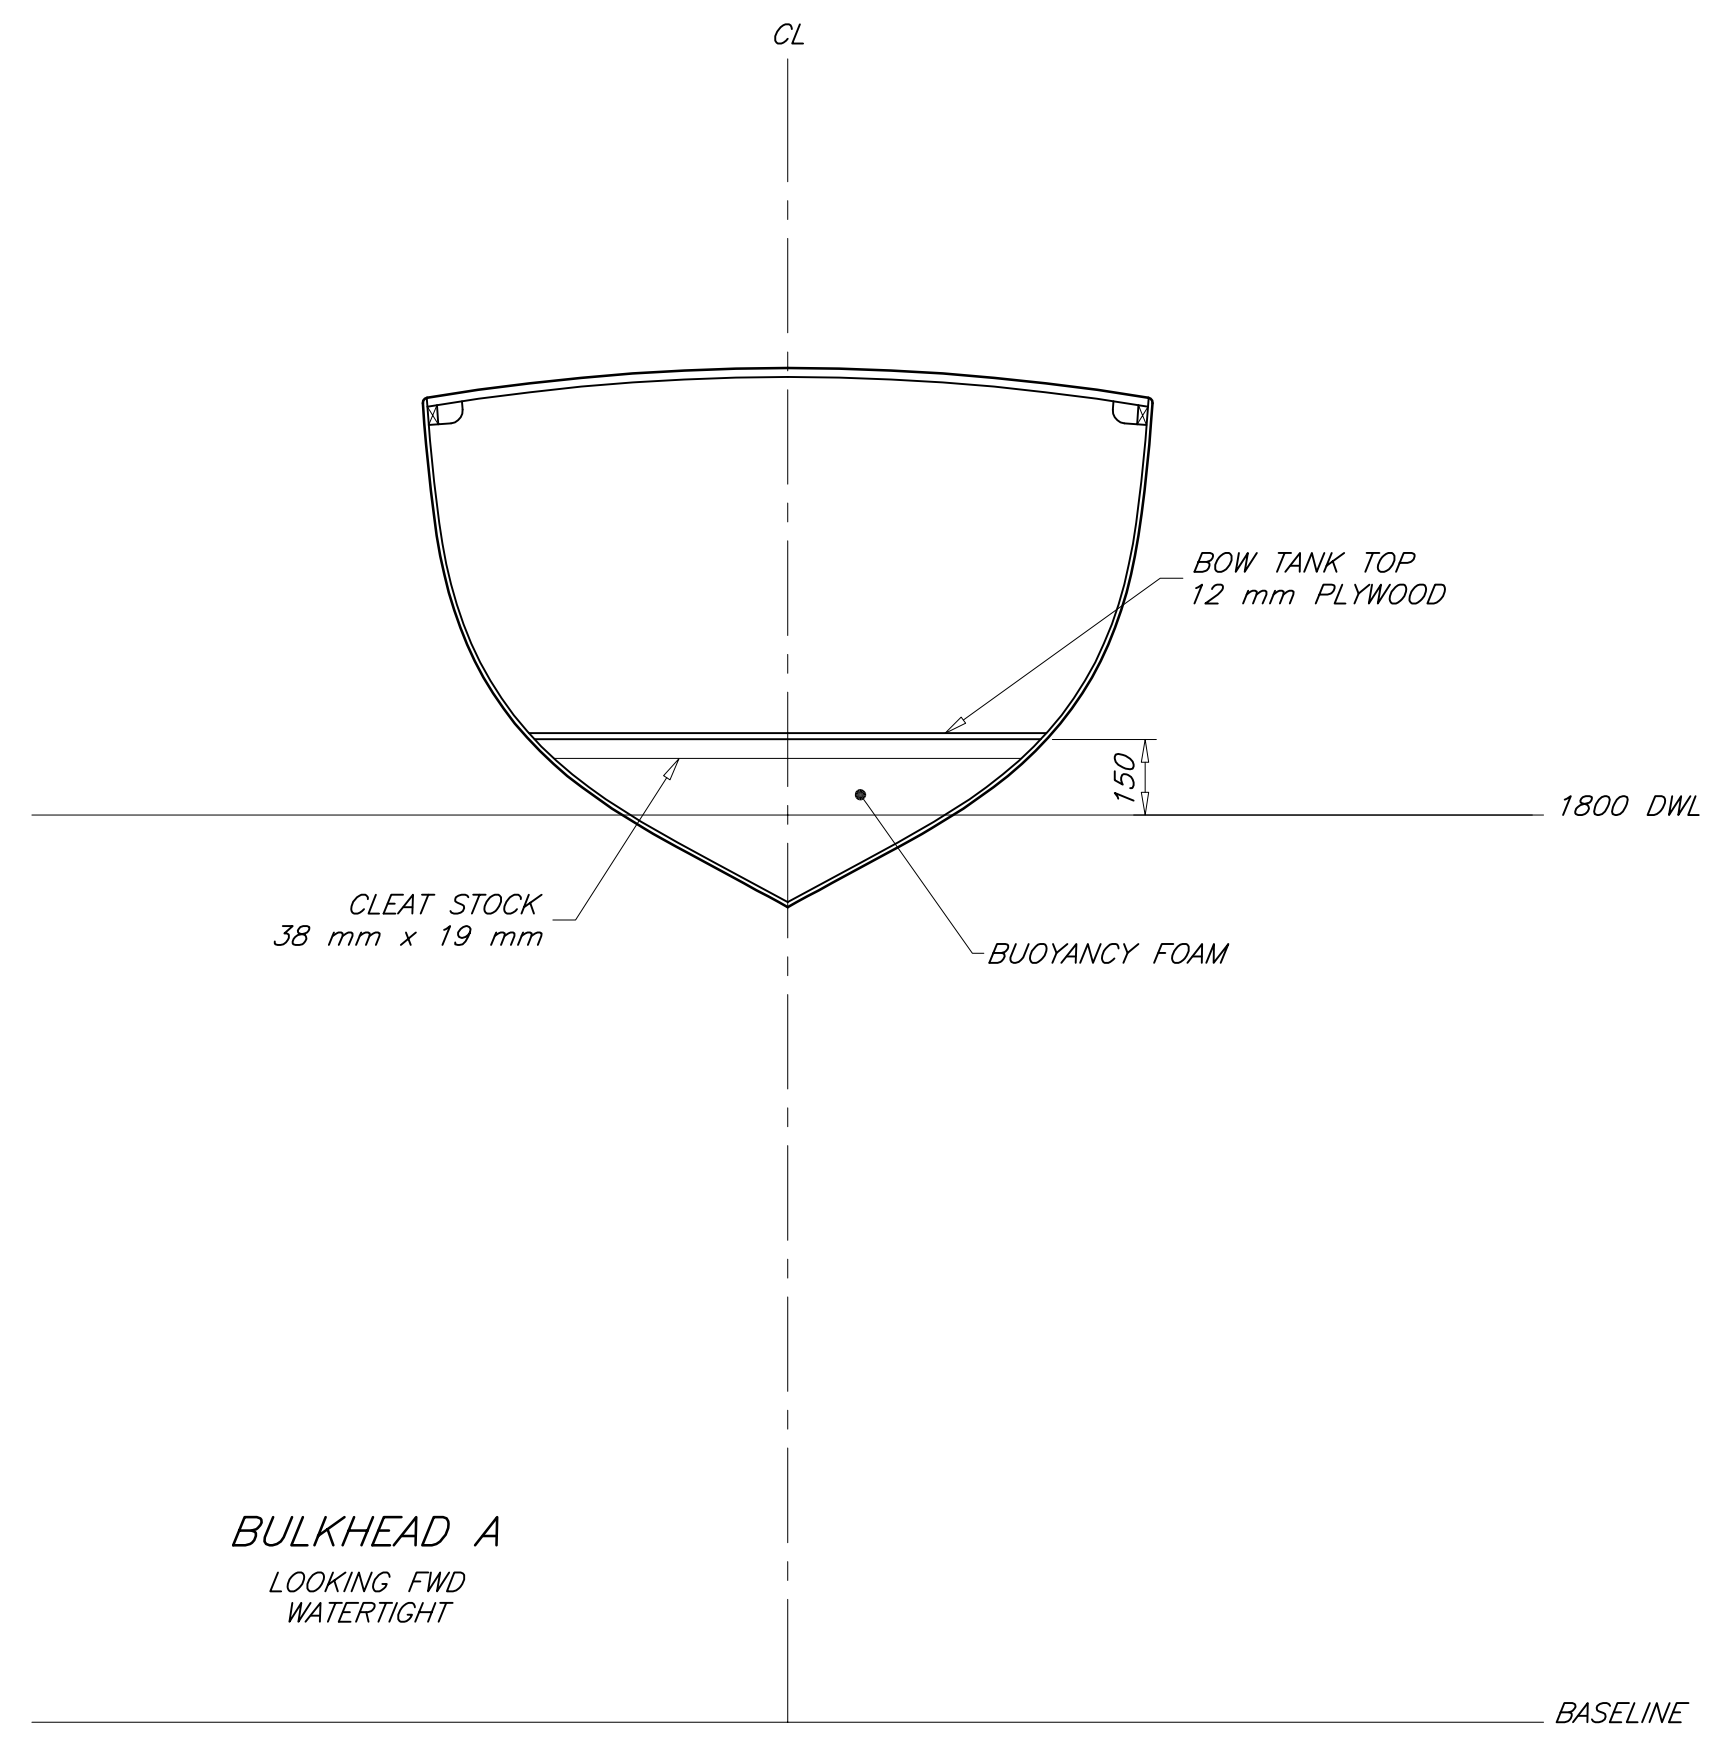

- GENERAL NOTES**
- PLYWOOD IS OKOUME MARINE GRADE PLYWOOD MEETING BRITISH STANDARD SPECIFICATION FOR MARINE PLYWOOD BS 1088.
MINIMUM MODULUS OF RUPTURE = 40 MPa (5,800 psi)
MINIMUM MODULUS OF ELASTICITY = 4,500 MPa (652,500 psi)
 - SEE REFERENCE 1 FOR BONDING DETAIL.
 - PLYWOOD AND CLEAT STOCK TO BE SEALED WITH EPOXY RESIN BEFORE INSTALLATION.

2	GENERAL ARRANGEMENT	05-B1
1	CONSTRUCTION DETAILS	05-C3
NO	TITLE	DWG NO


REFERENCES

STOCK PLANS

12.9 METER SKERRY CRUISER

JOINER SECTIONS

PAUL R. KOTZEBUE, PE
MECHANICAL ENGINEER
Encinitas, California USA

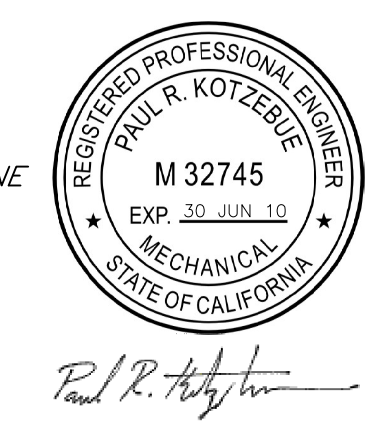

THIS DRAWING REMAINS THE PROPERTY OF PAUL R. KOTZEBUE, PE AND MAY NOT BE USED FOR ANY PURPOSE WITHOUT WRITTEN CONSENT.

DRAFTER: PK	DATE: 15 MAY 10	SIZE: ARCH D	DWG NO: 05-B2	REV: -
CHECKER: PK	DATE: 15 MAY 10	SCALE: 1 : 15	SWBS: - -	SHEET: 1 OF 1